COLOURED-BODY PORCELAIN · 12″ × 24″

Tropical Grass

The texture of woven grass, the toughness of porcelain.

WHITE
ZY.TG.WHT.1224

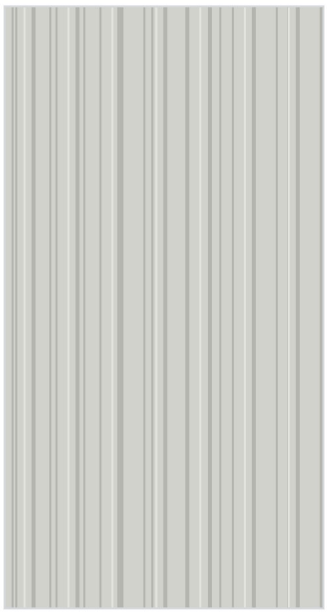

NEW SILVER
ZY.TG.SIL.1224

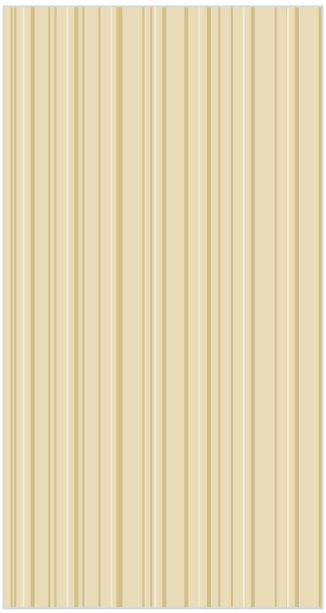

CREAM
ZY.TG.CRM.1224

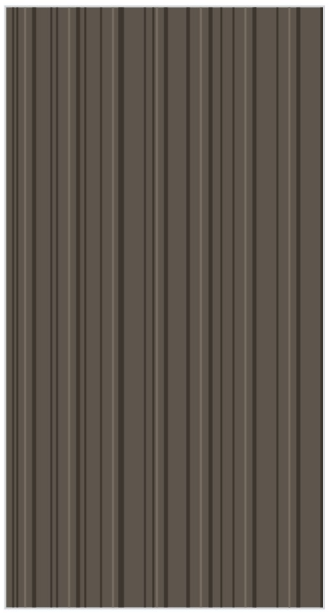

BROWN
ZY.TG.BWN.1224

Fine vertical streaks give each tile the soft, linear look of natural grass cloth, without the upkeep. Because the colour runs through the body of the tile, chips are much less noticeable. It's frost-resistant, so the same tile can run from the kitchen floor out to a covered patio.

SIZE	EDGE	USE	SHADE VARIATION
30 × 60 cm (12″ × 24″)	Rectified (thin grout lines)	Floors & walls Indoor & outdoor	V2 – slight tile-to-tile

Specs, packing & install

Performance · all tests conform

TEST	STANDARD	REQUIREMENT	RESULT	WHAT IT MEANS FOR YOU
Water absorption	ISO 10545-3	< 0.5%	Conforms	Dense porcelain that shrugs off moisture and stains
Bending strength	ISO 10545-4	> 1300 N	Conforms	Strong enough for busy floors
Frost resistance	ISO 10545-12	Required	Conforms	Suitable for outdoor use through Canadian winters*
Dynamic C.O.F.	ANSI A137.1	> 0.42	Conforms	Meets the slip-resistance minimum for level indoor floors that may get wet
Deep abrasion	ISO 10545-6	< 175 mm^3	Conforms	Wears well in high-traffic areas

Where it works

Residential | Commercial | Indoor | Outdoor | Walls | Floors

Packing details

SIZE	PCS/BOX	SQ FT/BOX	LB/BOX	BOX/PAL
12″ × 24″	8	15.50	75	40

How many boxes?

Area ÷ 15.5, add 10% for cuts, round up.
Example: 200 sq ft → 12.9 → 14.2 → **15 boxes**

Laying tips

- For an offset pattern, stagger by **⅓ of the tile**, not half. This reduces lippage on long tiles.
- Run the streaks along the longest wall to make the room feel larger.
- Shade varies slightly (V2), so blend tiles from several boxes as you go.
- Rectified edges allow narrow grout joints. Match the grout colour for a seamless look.

Installation

- Use a polymer-modified mortar rated for large-format porcelain, with full coverage
- Outdoors: exterior-rated setting materials, a solid base and proper drainage
- Follow the mortar maker's and TCNA guidelines

Care

- Sweep, then damp-mop with a pH-neutral tile cleaner
- Remove grout haze soon after installing
- Seal cement-based grout; reseal every few years

Want a sample or a quote?

SA Supply · Oakville, Ontario
[phone] · [email] · [website]

We supply materials; installation is by your contractor. Special orders may take longer to arrive.

* When installed with exterior-rated materials. Technical data is supplied by the manufacturer and may change. Colours may vary from print; view a sample before buying.